

## ORDERING FORMAT

**Fixture** **SAL-UWLED**  
Seamlessline  
Architectural  
Lighting US Wire LED



**LENGTH**  
850 = 850mm (33-1/2")  
1000 = 1000mm (39-3/8")  
1250 = 1250mm (49-1/4")  
1500 = 1500mm (59-1/16")

**M**  
**DIMMING**  
M = Dimming  
120-277V

**Lamp** **SLEDU**  
T6 Seamlessline  
LED lamp USA



**LENGTH**  
850 = 850mm (33-1/4")  
1000 = 1000mm (39-3/16")  
1250 = 1250mm (49")  
1500 = 1500mm (58-7/8")

**COLOR**  
L24 = 2400K  
L28 = 2800K  
L30 = 3000K  
L35 = 3500K  
L42 = 4200K  
L50 = 5000K

## FIXTURE AND DRIVER DATA

fixture model	nominal length (in)	fixture length		fixture weight (lb)	input current (A) (120-277)	input wattage (W)	lamp length		lamp weight (lb)	lamp (W)
		(mm)	(in)				(mm)	(in)		
SAL-UWLED 850M	34	850	33-1/2	2.2	0.13-0.07	16	848	33-1/4	0.5	12.7
SAL-UWLED 1000M	40	1000	39-3/8	2.4	0.16-0.08	19	998	39-3/16	0.6	14.6
SAL-UWLED 1250M	50	1250	49-1/4	2.6	0.19-0.09	23	1248	49	0.7	18.4
SAL-UWLED 1500M	60	1500	59-1/16	3.1	0.23-0.11	28	1498	58-7/8	0.9	21.6

Voltage: 100-277V, 50/60 Hz  
Dimmable: 0-10V. Dimmable to 6%  
Power: AC Power driver built in  
Finish: Aluminum anodized



## LAMP DATA

color code	color temp.	CRI	lumens (lm) per lamp length			
			850mm 33-1/4"	1000mm 39-3/16"	1250mm 49"	1500mm 58-7/8"
L24	2400	83	1082	1276	1646	1927
L28	2800	83	1107	1305	1683	1971
L30	3000	83	1132	1334	1720	2015
L35	3500	86	1181	1392	1795	2102
L42	4200	86	1205	1421	1833	2146
L50	5000	86	1230	1450	1870	2190


Average Lamp Life: 50,000 hrs.  
≤5% variation of lumens/foot within each color temperature, regardless of lengths are being used.

## DIMENSIONS

Fixtures (Nominal Length)	
34" SAL-UWLED 850 M 850mm (33-1/2")	
40" SAL-UWLED 1000 M 1000mm (39-3/8")	
50" SAL-UWLED 1250 M 1250mm (49-1/4")	
60" SAL-UWLED 1500 M 1500mm (59-1/16")	
Lamps (Nominal Length)	
34" SLEDU 850 848mm (33-1/4")	
40" SLEDU 1000 998mm (39-3/16")	
50" SLEDU 1250 1248mm (49")	
60" SLEDU 1500 1498mm (58-7/8")	



## ADJOINING DETAIL

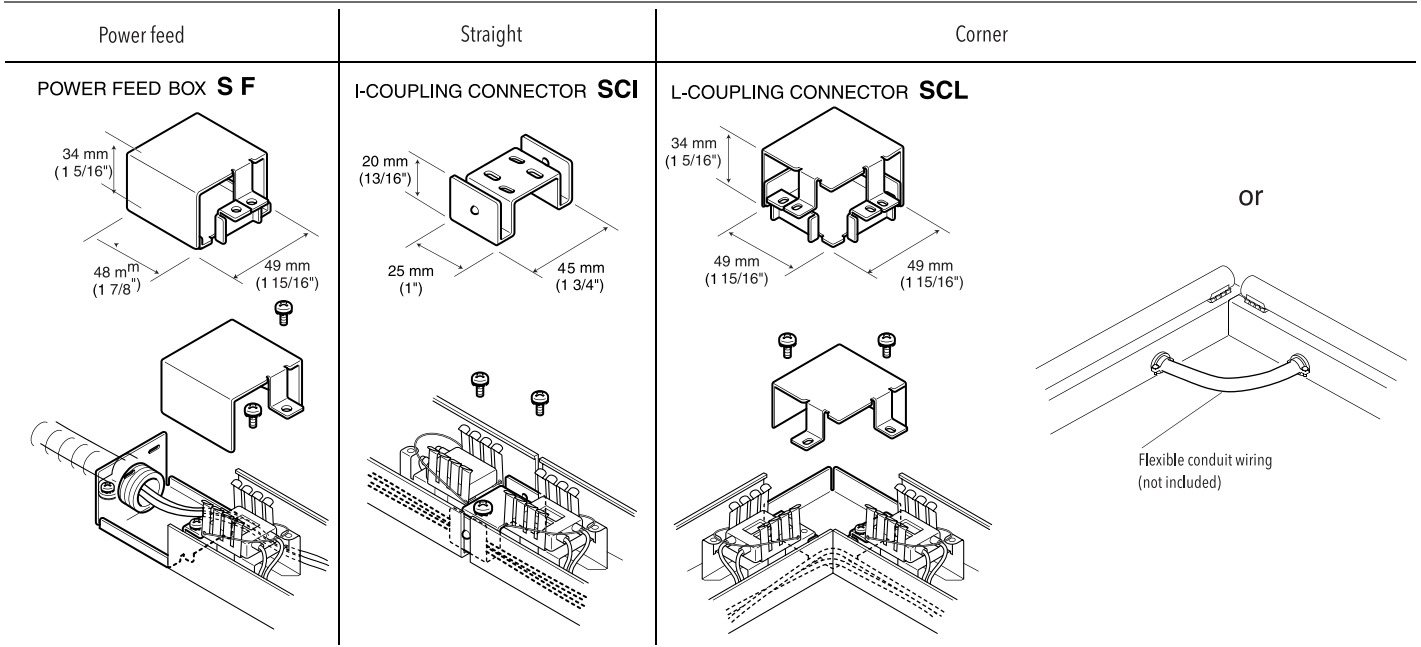

## MOUNTING LOCATIONS

